


CHANGE VERSION	REMARKS	C		
A	14/11/10	REL	D	
B	14/12/22	ADD P/N	E	


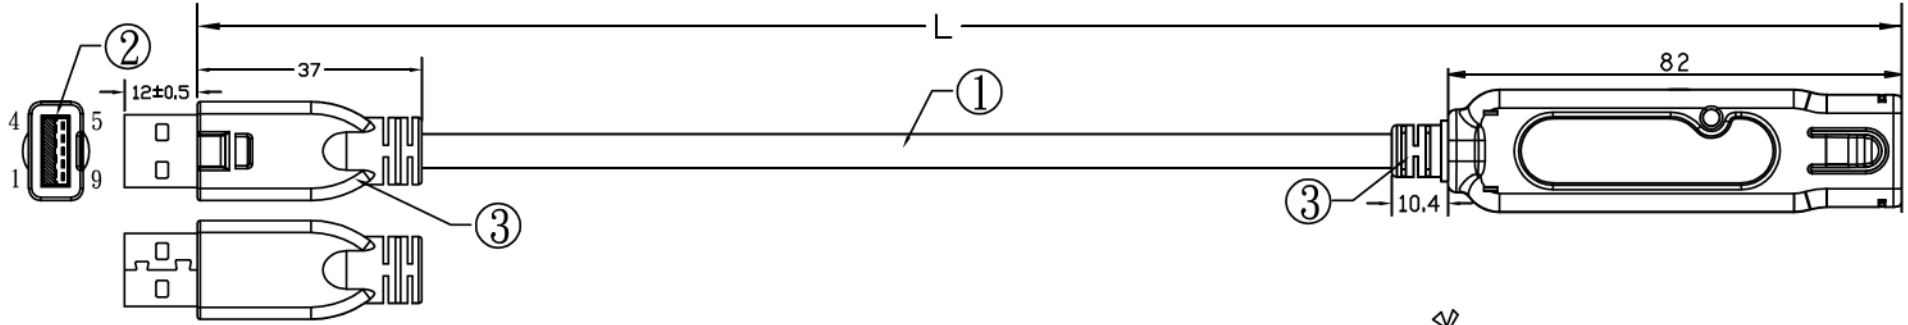


PIN OUT:
USB3.0 AM OPEN


- 1 ————— RD
- 2 ————— WH
- 3 ————— GN
- 4 ————— BK
- 5 ————— BL
- 6 ————— YL
- 7 ————— SDP DRAIN
- 8 ————— PR
- 9 ————— OR
- S ————— BRAID

P/N	LENGTH	PE BAG
RR-USB3-EXT-20FTE	6000±60	06*8" *12"
RR-USB3-EXT-33FTE	10000±100	06*9" *13"


P/N LABEL: WHITE BASE BLACK WORD

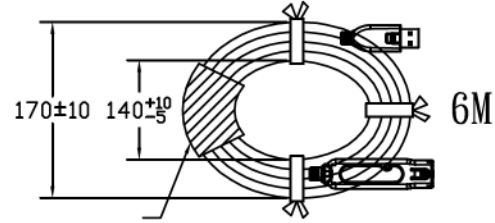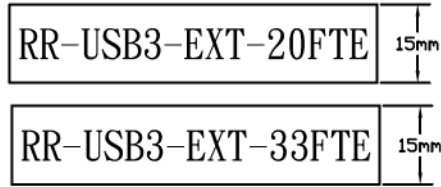

WRAP AROUND 3 TIMES BY PE FILM

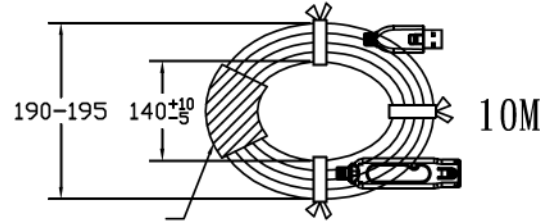

WRAP AROUND 3 TIMES BY PE FILM

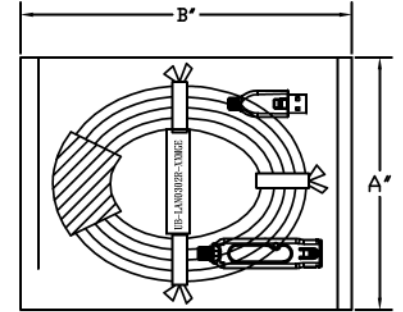

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	USB3.0 UL2725 [(24AWG*2C+1+AL)+OD:1.95*3.3]*2C+ (24AWG*1P+AL)+20AWG*2C+AL+B(24*10/0.12 TC COVER 95% MIN) OD:7.0±0.15 BLACK(B792) (COPARTNER)	1
2	PLUG	USB3.0"A" TYPE MALE PIN=G/F	1
3	PVC	45P BLACK(B792)PVC	15g
4	PACKAGE	1PCE/PE BAG:06*A"*B"+ P/N STICKER	1

MOLD TOOL NO.		www.USBFireWire.com			DRAWN BY Marcos	
USB3.0 AM A110-658-003 SR C130-385-001		SCALE	UNIT	REV	CHECKED BY	
			MM	B	CONFIRMED BY	
FILE NAME		CUSTOMER			CHECKED BY	
OW1411004						
DATE		CUSTOMER P/N			APPROVED BY	
14/12/22						

RoHS