

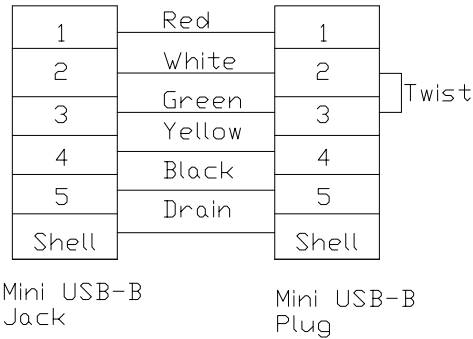

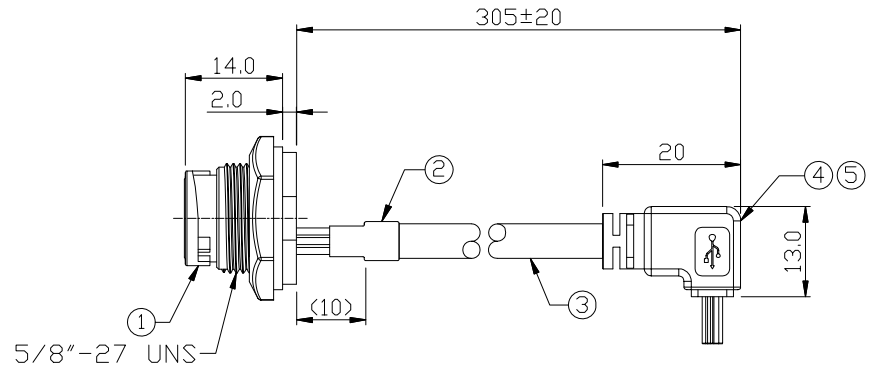


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 01/27/15	Lucas 01/27/15	Ray 01/27/15

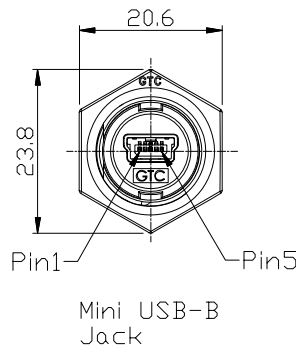

Item	Part Name	Material / Finish	Q'ty
5	Mini USB-B Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Au Plated	1
4	Over Mold	PVC Color: Black	1
3	Cable	UL2725 1P*28AWG+3C*24AWG+Al/My+D+B(UV) OD=5.0mm, Color: Black	1
2	Shrink Tube	L=20mm Color: Black	1
1	Mini USB-B Plastic C2 Panel Jack Lock		1

Wiring Diagram

TITLE						DRAWING NUMBER			REV.	
Mini USB-B Plastic C2 Panel Jack Lock With Up Angle Mini USB-B Plug						RR-WPMBF-MBR2-12GL			01	
	B	1:1	Lucas 01/27/15	Lucas 01/27/15	Ray 01/27/15	X.X ± 0.5	X.XXX ± 0.05	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

USB FIREWIRE .com

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF USB FIREWIRE, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE, NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2015

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF USB FIREWIRE .COM THE POSSESSOR AGREES TO THE FOLLOWING:

- TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
- NOT TO REPRODUCE OR COPY IT
- NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
- ALL RIGHTS RESERVED