


1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-150818	Modify dimension	Lucas 09/25/15	Ray 09/25/15	Ray 09/25/15

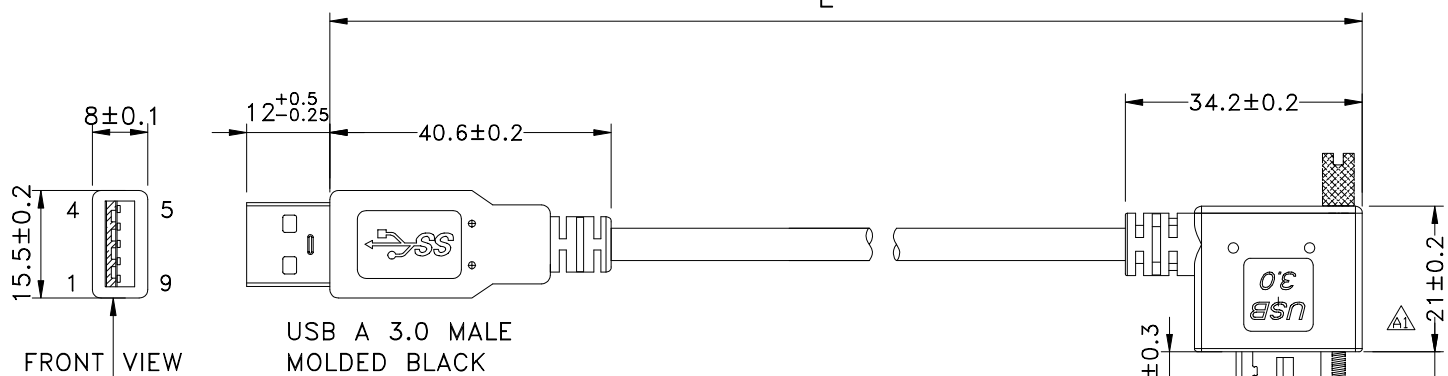

FRONT VIEW


USB A 3.0 MALE
MOLDED BLACK

Plastic Tongue
(Black Shaded Area)

DOC.CENTER.ISSUE
SEP.25.2015
ONLY FOR
RELEASE

PIN OUT

USB A M	Micro-USB BM
1	RED
2	WHITE
3	GREEN
4	BLACK
5	BLUE
6	YELLOW
7	DRAIN
8	PURPLE
9	ORANGE
SHEEL	BRAID
	SHEEL

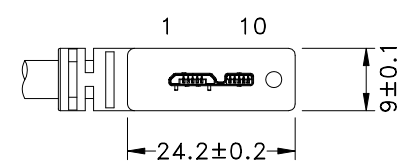

Micro-USB 3.0 B/M
RIGHT ANGLE LEFT
MOLDED BLACK

P/N	LENGTH
RR-ASMLK-20GR	508 ⁺³⁰ ₀
RR-ASMLK-78GR	1980 ⁺⁶⁰ ₀
RR-ASMLK-120GR	3048±50
RR-ASMLK-196GR	4978±50

TITLE USB3.0 AM To Micro USB3.0 BM RIGHT ANGLE LEFT				DRAWING NUMBER RR-ASMLK-XXGR				REV. A1	
DO NOT SCALE DRAWINGS	B	1:1	Lucas 09/25/14	Ray 09/25/14	Ray 09/25/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019

1

2

3

4

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-150818	Modify dimension	Lucas 09/25/15	Ray 09/25/15	Ray 09/25/15

***CONSTRUCTION:


1.CABLE: * UL2725 (1PR/28#+EAM)*2+(1PR/28#+A)+2C/24#+AB85%
OD:5.5mm BLACKE JACKET (REV:3.0)

***CONNECTOR:

2.USB A/M: * USB A "3.0" TYPE 9PIN MALE SOLDER TYPE.(NEW-CONN P/N:06801508M5CA)
* PINS: 30u GOLD PLATED OVER NICKEL.
* SHELL: STEEL WITH GOLD FLASH .
* INSULATOR: BLUE COLOR P.B.T UL 94V-0 RATED.
* MOLDED BLACK PVC 45P.

3.Micro-USB B/M: * MICRO-USB B "3.0" TYPE 10PIN MALE SOLDER TYPE.(SWEETRAY P/N:CHMICROUSB3BM01E)
* PINS: 30u GOLD PLATED OVER NICKEL.
* SHELL: STEEL WITH GOLD FLASH .
* INSULATOR: BLACK COLOR P.B.T UL 94V-0 RATED.
* SCREW: M2 6.0*30.5mm.
* MOLDED BLACK PVC 45P.

4.TEST: * CT: 2 ohm IS: 5M ohm.
5.PACKING: * PACK EACH CABLE IN A POLY BAG AND 25PCS IN A POLY BAG.
6.MATERIAL: * MATERIAL WITH RoHS GRADE.



TITLE USB3.0 AM To Micro USB3.0 BM RIGHT ANGLE LEFT			DRAWING NUMBER RR-ASMLK-XXGR			REV. A1			
	B	1:1	Lucas 09/25/14	Ray 09/25/14	Ray 09/25/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	2/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART

COPYRIGHT © 2019

1

2

3

4