



| CHANGE VERSION | REMARKS | C | 09/04/29 | SELF REMARK | F | 14/11/11 | CHANGE PACKAGE |
|----------------|----------------------|---|----------|------------------------------|---|----------|----------------|
| A | 09/04/06 REL | D | 11/10/07 | ADD BRAID WAY, CHANGE CABLE | G | 15/05/28 | ADD P/N |
| B | 09/04/10 SELF REMARK | E | 12/11/15 | CHANGE CABLE, REMOVE STICKER | | | |

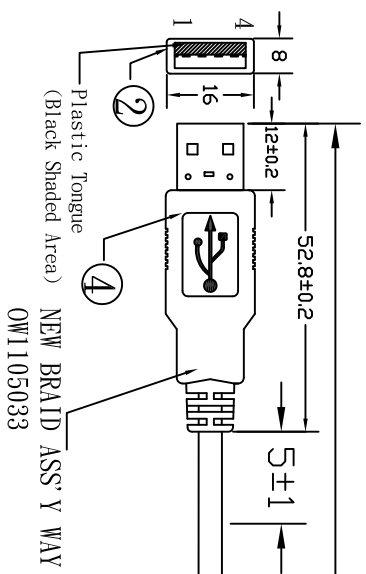

PIN OUT :

- | | |
|--------|-----------|
| USB AM | MICRO USB |
| 1 | 1 RD |
| 2 | 2 WH |
| 3 | 3 GN |
| 4 | 5 BK |
| S | S BRAID |

| P/N | LENGTH | PACKAGE | PE BAG |
|--------------|---------|---------|-----------|
| RR-ALMCB-05G | 127±10 | (1) | 06*3" *8" |
| RR-ALMCB-12G | 305±20 | (2) | 06*3" *8" |
| RR-ALMCB-24G | 610±30 | (3) | 06*4" *6" |
| RR-ALMCB-36G | 915±30 | (3) | 06*6" *8" |
| RR-ALMCB-72G | 1830±50 | (3) | 06*6" *8" |

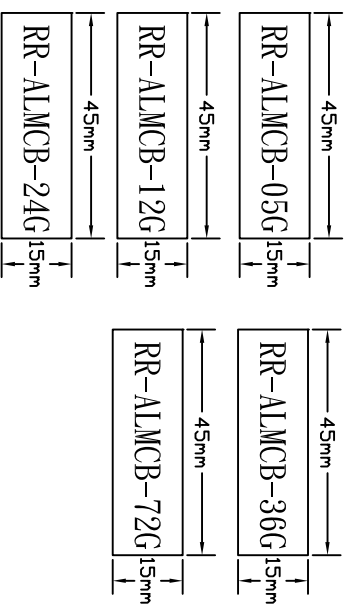

MATERIAL LIST :

| NO. | P/NAME | DESCRIPTION | Q' TY |
|-----|---------|--|-------|
| 1 | WIRE | UL2725 28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(TC)+ BK(16*4/0.10 TC) OD:5.0±0.15 BLACK (B792) 2.0 (COPARTNER) | 1 |
| 2 | PLUG | USB "A" TYPE MALE GOLD PLATED | 1 |
| 3 | PLUG | MICRO USB "B" TYPE 5P MALE GOLD PLATED SHORT TYPE | 1 |
| 4 | PVC | 45P BLACK (B792)PVC | 12g |
| 5 | PACKAGE | IPCE/PE BAG:06*A"*B"+ P/N STICKER | 1 |

P/N STICKER

| MOLD TOOL NO. | Q' TY |
|-------------------------------|-------|
| "A" TYPE A110-160-001 | 1 |
| MICRO USB 90° A110-590-001 | 1 |

| | |
|--|---|
| USB-FIREWIRE.com | <p>THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR IN PART. COPYRIGHT © 2019</p> |
| <p>FILE NAME: OW0904013</p> <p>DATE: 15/05/28</p> | <p>CUSTOMER: CUSTOMER P/N</p> |
| <p>SCALE: MM</p> <p>UNIT: G</p> | <p>REV: G</p> |

ROHS

| | | | |
|------------------|-------------|---------------|--------------|
| DRAWN BY: MARCOS | CHECKED BY: | CONFIRMED BY: | APPROVED BY: |
|------------------|-------------|---------------|--------------|

