


CHANGE VERSION	REMARKS	C	11/10/07	CHANGE CABLE, REMOVE STICKER
A	10/02/05	REL	D	
B	11/10/07	CHANGE CABLE	E	


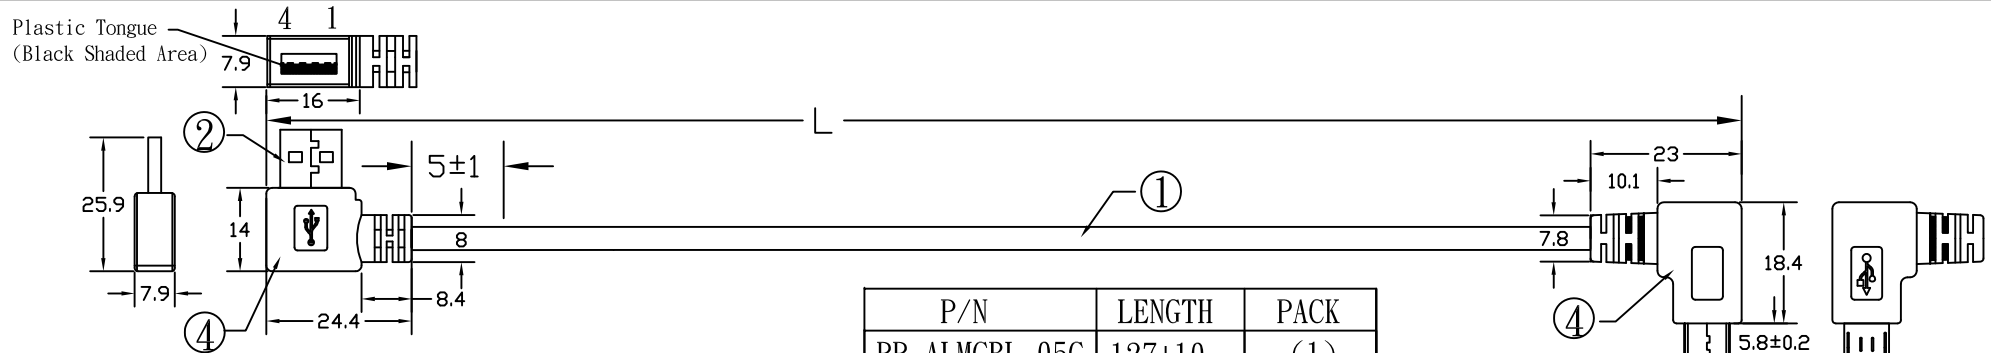


P/N	LENGTH	PACK
RR-ALMCBL-05G	127±10	(1)
RR-ALMCBL-12G	305±20	(2)
RR-ALMCBL-30G	762±30	(3)

PIN OUT :	
USB AM	MICRO USB
1	1 RD
2	2 WH
3	3 GN
4	5 BK
S	S BRAID

45mm	15mm
RR-ALMCBL-05G	
45mm	15mm
RR-ALMCBL-12G	
45mm	15mm
RR-ALMCBL-30G	

P/N STICKER

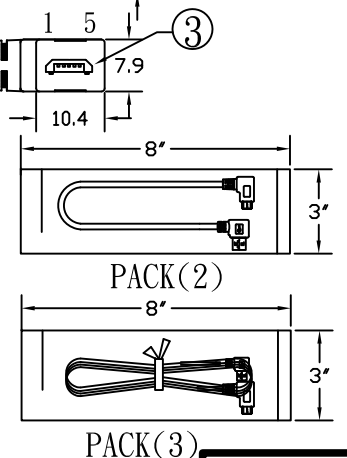

PACK(3)

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL2725 28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(TC)+B(16*4/0.10 TC) OD:5.0±0.15 BLACK (B792) 2.0 (COPARTNER)	1
2	PLUG	USB"A" TYPE MALE GOLD PLATED SHORT TYPE	1
3	PLUG	MICRO USB"B"TYPE 5P MALE GOLD PLATED SHORT TYPE	1
4	PVC	45P BLACK (B792)PVC	12g
5	PACKAGE	1PCE/PE BAG:06*3" *8" + P/N STICKER	1


MOLD TOOL NO.

"A" TYPE
A110-557-001

MICRO USB 90°
A110-590-001



THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE; NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART.
COPYRIGHT © 2019



FILE NAME

OW1002004

DATE

13/01/25

SCALE

UNIT

REV

MM

C

CUSTOMER

CUSTOMER P/N

DRAWN BY

MARCOS

CHECKED BY

CONFIRMED BY

CHECKED BY

APPROVED BY

RoHS