


1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-200924	Add Nut Size	Lucas 09/23/20	Lucas 09/23/20	Ray 09/23/20

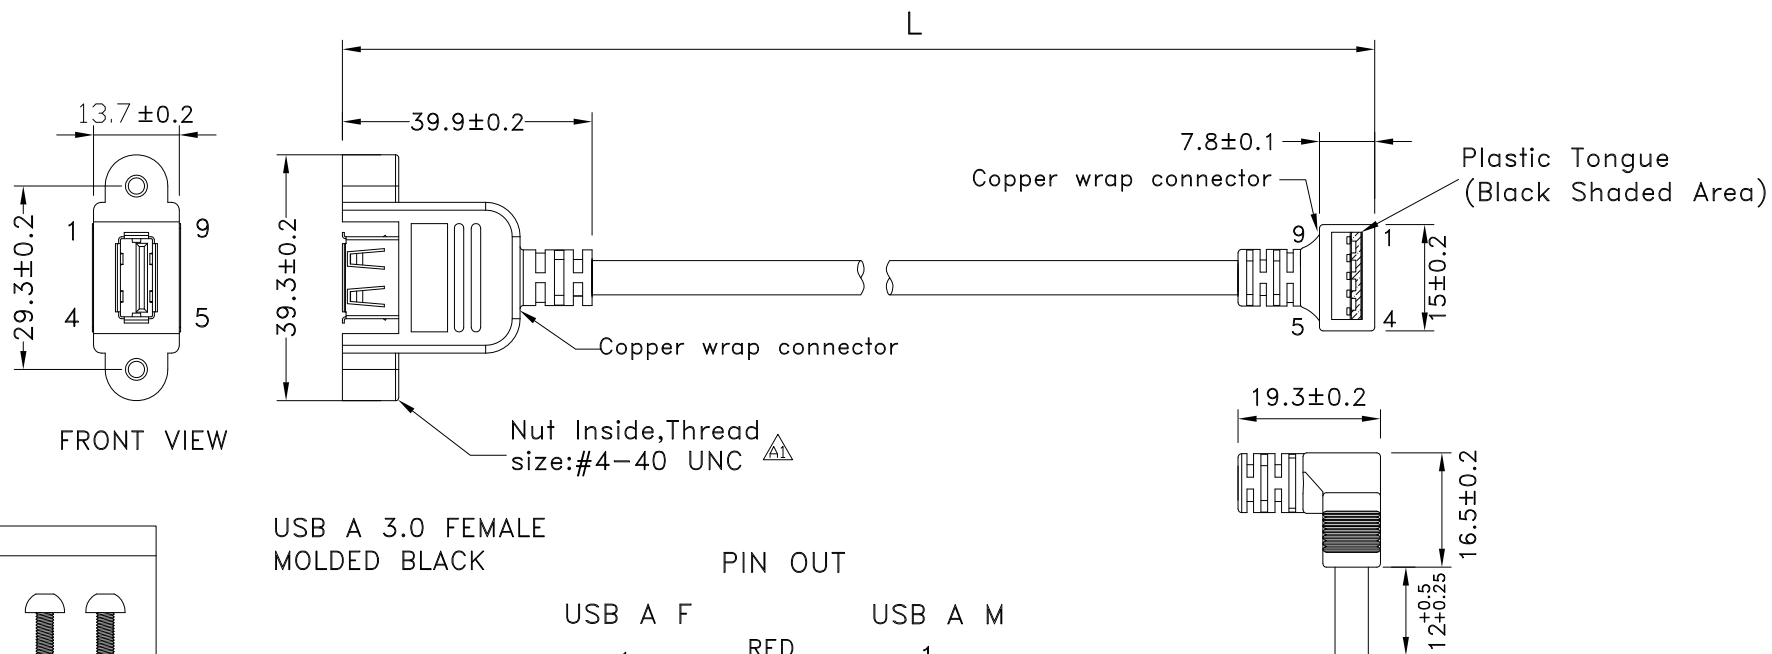

P/N	LENGTH
RR-AUAFPM-06GR	153 ⁺²⁰ ₋₀
RR-AUAFPM-12GR	305 ⁺²⁰ ₋₀
RR-AUAFPM-24GR	610 ⁺³⁰ ₋₀

TITLE						DRAWING NUMBER				REV.	
USB3.0 AM UP ANGLE TO A FEMALE						RR-AUAFPM-XXGR				A1	
	B	1:1	Lucas 09/29/14	Ray 09/29/14	Ray 09/29/14	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm	1/3
DO NOT SCALE DRAWINGS	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES				UNIT	SHEET
THIRD ANGLE PROJECTION											



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-200924	Add Nut Size	Lucas 09/23/20	Lucas 09/23/20	Ray 09/23/20

***CONSTRUCTION:

1.CABLE: * UL2725 (1PR/28#+EAM)*2+(1PR/28#+A)+2C/24#+AB85%
OD:5.5mm BLACKE JACKET (REV:3.0)

***CONNECTOR:

2.USB A/M: * USB A "3.0" TYPE 9PIN MALE SOLDER TYPE.
* PINS: 30u GOLD PLATED OVER NICKEL.
* SHELL: STEEL WITH GOLD FLASH .
* INSULATOR: BLUE COLOR P.B.T UL 94V-0 RATED.
* MOLDED BLACK PVC 45P.

3.USB A/F: * USB A "3.0" TYPE 9PIN FEMALE SOLDER TYPE.
* PINS: 30u GOLD PLATED OVER NICKEL.
* SHELL: BRASS WITH GOLD FLASH .
* INSULATOR: BLUE COLOR P.B.T UL 94V-0 RATED.
* SCREW: 5.0*11mm, NUT: #4-40UNC L=3mm W=6.3mm.
* MOLDED BLACK PVC 45P.

4.TEST: * CT: 2 ohm IS: 5M ohm.

5.PACKING: * PACK EACH CABLE IN A POLY BAG AND 25PCS IN A POLY BAG.

6.MATERIAL: * MATERIAL WITH RoHS GRADE.



TITLE						DRAWING NUMBER				REV.
USB3.0 AM UP ANGLE TO A FEMALE						RR-AUAFPM-XXGR				A1
	B	1:1	Lucas 09/29/14	Ray 09/29/14	Ray 09/29/14	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm 2/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES			UNIT	SHEET


USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-200924	Add Nut Size	Lucas 09/23/20	Lucas 09/23/20	Ray 09/23/20

P/N	LENGTH(mm)	PE BAG(inch)	PACKAGE
RR-AUAFPM-06GR	153 ⁺²⁰ ₋₀	5.5*10	(1)
RR-AUAFPM-12GR	305 ⁺²⁰ ₋₀	5.5*10	(2)
RR-AUAFPM-24GR	610 ⁺³⁰ ₋₀	5.5*10	(2)


PE BAG LABEL

RR-AUAFPM-XXGR REV:XX
LOT: XXXX
Made in China

75mm


RR-AUAFPM-XXGR REV:XX QTY:25PCS
LOT: XXXX
Made in China

RoHS LABEL

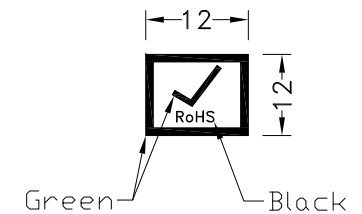


NOTES:PACK EACH CABLE IN A POLY BAG
AND 25PCS IN A POLY BAG.



PACK(1)



PACK(2)



PACK(3)

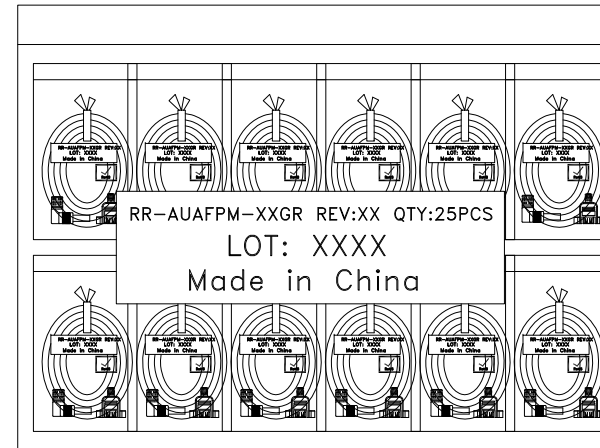

TITLE						DRAWING NUMBER			REV.
USB3.0 AM UP ANGLE TO A FEMALE						RR-AUAFPM-XXGR			A1
 DO NOT SCALE DRAWINGS	B	1:1	Lucas 09/29/14	Ray 09/29/14	Ray 09/29/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	3/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY
AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE
POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART