



CHANGE VERSION	REMARKS	C
A	14/03/06 REL	D
B		E

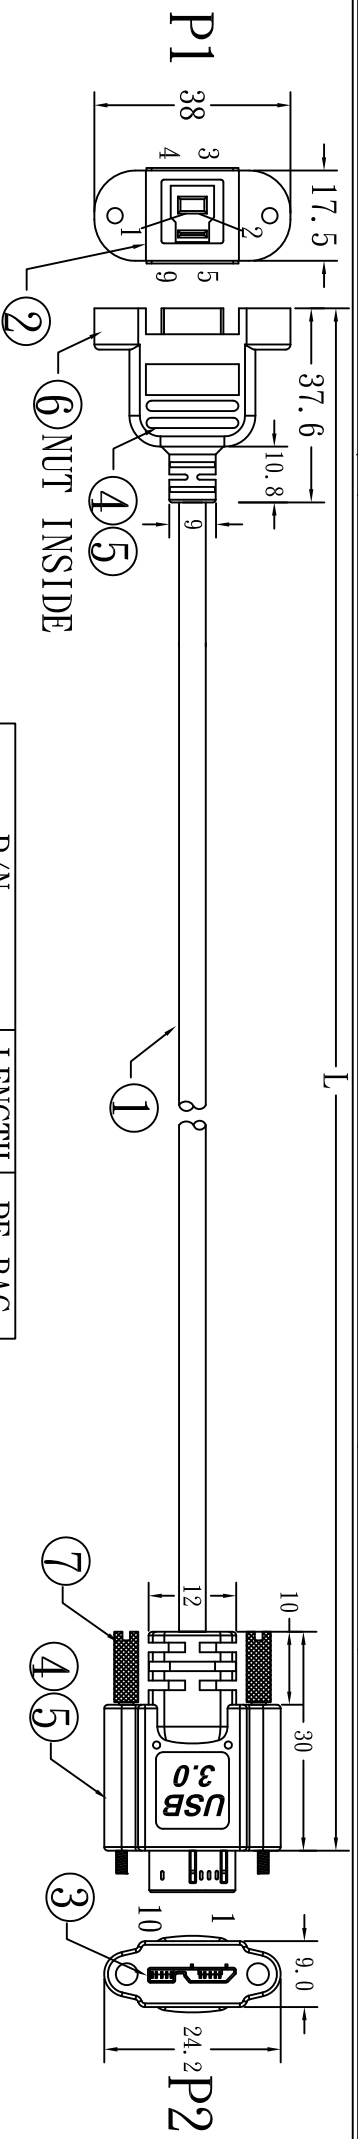


PIN OUT:

P/N	LENGTH	PE BAG
RR-MSKBFPM-30GR	762 ⁺⁴⁰	06*3"*8"
RR-MSKBFPM-40GR	1016 ⁺⁴⁰	06*3"*8"

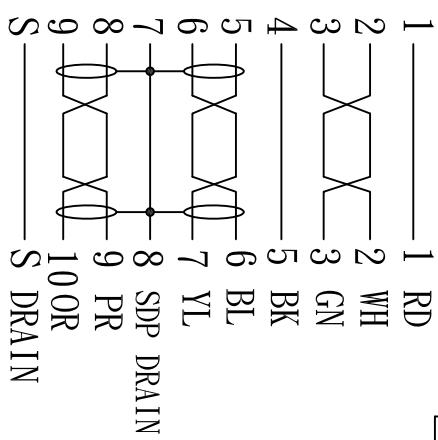

RR-MSKBFPM-30GR	45mm	15mm
RR-MSKBFPM-40GR		15mm

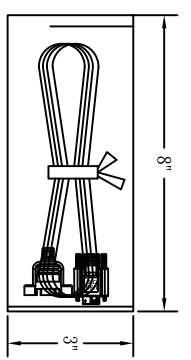

MATERIAL LIST :

NO.	P/NAME	DESCRIPTION	Q' TY
1	WIRE	UL20276 [28AWG(7/0.12 TC)*1P+1+AL+MYLAR]*2C+28AWG(7/0.12 TC)*1P+24AWG(7/0.20 TC)*2C+AL+1(BC)+80B(AM) OD:5.5±0.15 BLACK(B792) USB3.0 VER.	1
2	PLUG	USB3.0 "B" TYPE FEMALE PIN=30u" GOLD PLATED DIP TYPE	1
3	PLUG	MICRO USB 3.0 "B" TYPE MALE PIN=30u" GOLD PLATED	1
4	PVC	LD PE	4g
5	PVC	45P BLACK(B792)PVC	16g
6	NUT	#4-40 NUT	2
7	SCREW	M2.0 4*3.4mm	2
8	PACKAGE	IPCE/PE BAG:06*A*B", + P/N STICKER (2PCS 5.3*10mm)+TYPE SCREW, IN 2.5*5CM PE BAG)	1

MOLD TOOL NO.
USB 3.0 BF A110-693-001 B120-334-001
MICRO USB A110-678-001 B120-343-001

www.USBFireWire.com			
FILE NAME	SCALE	UNIT	REV
OW1403013		MM	A
DATE	CUSTOMER P/N		
14/03/06			

DRAWN BY	CHECKED BY	CONFIRMED BY
	Marcos	
	CHECKED BY	
	APPROVED BY	

ROHS